



BLOCK2.0



KRONOS
CERAMICHE

MUCH MORE THAN BEAUTIFUL MUCH MORE THAN STRONG



DRIVE WAYS



INDUSTRY



HOSPITALITY
AREAS



LANDSCAPING
PROJECTS



NURSERY



URBAN
LOCATIONS



WALKWAYS




GARDENS
PATIO AREAS



BLOCK 2.0

MUCH MORE THAN BEAUTIFUL MUCH MORE THAN STRONG

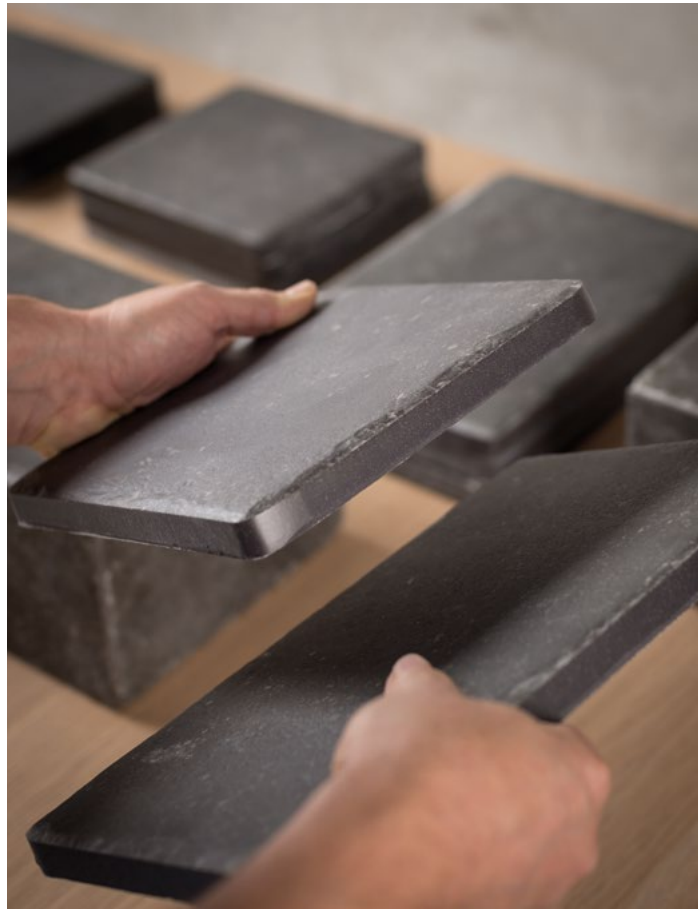

20,2x20,2 - 20,2x30,4

spessore: 2 cm

8"x8" - 8"x12"

thickness: ¾"





BLOCK 2.0

MUCH MORE THAN WINE

BLOCK 2.0



NAMUR

20,2x20,2 - 20,2x30,4

spessore: 2 cm

8"x8" - 8"x12"

thickness: ¾"



BLOCK 2.0

BLOCK 2.0





BLOCK 2.0



BLOCK 2.0



NAMUR

20,2x20,2 - 20,2x30,4

spessore: 2 cm

8"x8" - 8"x12"

thickness: ¾"

BLOCK 2.0



NAMUR

20,2x20,2 - 20,2x30,4

spessore: 2 cm

8"x8" - 8"x12"

thickness: ¾"

BLOCK 2.0



BLOCK 2-0



BLOCK 2.0



A close-up photograph of palm fronds. The fronds are long, narrow, and pointed, with a mix of green and yellowish-brown colors, suggesting some damage or aging. The background is dark and out of focus.

BLOCK 2.0



BLOCK 2.0

MUCH MORE THAN GARDEN

BLOCK 2.0



GENT

20,2x20,2 - 20,2x30,4

spessore: 2 cm

8"x8" - 8"x12"

thickness: ¾"

BLOCK 2.0





BLOCK 2.0



GENT

20,2x20,2 - 20,2x30,4


spessore: 2 cm

8"x8" - 8"x12"

thickness: ¾"

BLOCK 2.0





BLOCK 2.0



BLOCK 2.0

MUCH MORE THAN OUTDOOR

BLOCK 2.0



BRUGES

20,2x20,2 - 20,2x30,4

spessore: 2 cm

8"x8" - 8"x12"

thickness: ¾"





BLOCK





NAMUR

BLOCK 2.0



 20 mm - 3/4"



20,2x20,2 BLOCK NAMUR 2.0
9500 ■ K0694



20,2x30,4 BLOCK NAMUR 2.0
9505 ■ K0694



GENT

BLOCK 2.0



 20mm - 3/4"



20,2x20,2 BLOCK GENT 2.0
9501 ■ K0694



20,2x30,4 BLOCK GENT 2.0
9506 ■ K0694



BRUGES

BLOCK 2.0



 **20 mm - 3/4"**



20,2x20,2 BLOCK BRUGES 2.0
9502 ■ K0694




20,2x30,4 BLOCK BRUGES 2.0
9507 ■ K0694

IMBALLI_PACKAGING_EMBALLAGES_VERPACKUNGEN

BLOCK2.0	Thickness	Pezzi per scatola	M ² per scatola	Kg per scatola	Scatole per pallet	M ² per pallet	KG per pallet
20,2x20,2 - 8"x8"	20 mm - ¾"	12	0,49	20,40	54	26,46	1121,6
20x30 - 8"x12"	20 mm - ¾"	7	0,43	20,40	60	25,80	1244

CARATTERISTICHE TECNICHE_TECHNICAL CHARACTERISTICS_CARACTÉRISTIQUES TECHNIQUES_TECHNISCHE DATEN

NORME STANDARS NORMES NORMEN	CARATTERISTICHE E PROPRIETÀ CHARACTERISTICS OR PROPERTIES CARACTÉRISTIQUES OU PROPRIÉTÉS EIGENSCHAFTEN UND GÜTEMERKMALE	SECONDO LE NORME COMPLIANCE WITH STANDARDS CONFORME AUX NORMES ENTSPRECHEND DEN NORMEN UNI EN 14411 G	
ISO 10545-2	Spessore - Thickness Épaisseur - Stärke	20 mm - ¾"	Conforme alle norme - Complies with standard Conforme aux normes - Normgerecht
	Lunghezza e larghezza - Length and width Longueur et largeur - Länge und Breite	+/- 0,5 %	Conforme alle norme - Complies with standard Conforme aux normes - Normgerecht
ISO 10545-3	Assorbimento d' acqua - Water absorption Absorption d'eau - Wasseraufnahme	E <= 0,04 %	Conforme alle norme - Complies with standard Conforme aux normes - Normgerecht
ISO 10545-4	Resistenza alla flessione - Bending strength Résistance à la flexion - Biegezugfestigkeit	-	53 N/mm ²
ISO 10545-6	Resistenza all'abrasione - Resistance to deep abrasion Résistance à l'abrasion profonde - Tiefenabrieb	<128 mm ³	Conforme alle norme - Complies with standard Conforme aux normes - Normgerecht
ISO 10545-9	Resistenza agli sbalzi termici - Thermal shock resistance Résistance aux écarts thermiques - Temperaturwechselbeständigkeit	Richiesta - Requested Demandée - Auf Anfrage	Conforme alle norme - Complies with standard Conforme aux normes - Normgerecht
ISO 10545-12	Resistenza al gelo - Frost resistance Résistance au gel - Frostbeständigkeit	Richiesta - Requested Demandée - Auf Anfrage	Conforme alle norme - Complies with standard Conforme aux normes - Normgerecht
ISO 10545-13	Resistenza agli agenti chimici - Chemical resistance Résistance à l'attaque chimique - Beständigkeit gegen Chemikalien	-	UA ULA UHA
ISO 10545-14	Resistenza alle macchie - Resistance to stain Résistance aux taches - Fleckenfestigkeit	-	5
EN 13501 - 1	Resistenza al fuoco - Fire resistance Résistance au feu - Feuerwiderstand	-	Classe A1 - A1 FL
DIN 51130	Resistenza allo scivolamento - Slip resistance Résistance au glissement - Bestimmung der rutschhemmende eigenschaft	-	R11 grip
DIN 51097	Resistenza allo scivolamento - Slip resistance Résistance au glissement - Bestimmung der rutschhemmende eigenschaft	-	C grip
B.C.R.A. C.A. B.C.R.A. G.B. D.M. 236 del 4.6.1989	Resistenza allo scivolamento - Slip resistance Résistance au glissement - Bestimmung der rutschhemmende eigenschaft	Tortus Test	66 DRY / 60 WET
ASTM C 1028/07	Resistenza allo scivolamento - Slip resistance Résistance au glissement - Bestimmung der rutschhemmende eigenschaft	-	0,76 DRY / 0,62 WET grip
ENV 12633 BPN	Pendolum	-	GRIP: Pendolum con pattino 4S: 68 DRY / 60 WET Pendolum con pattino TRL: 87 DRY / 52 WET
DIN 51094	Stabilità dei colori alla luce e ai raggi U.V. Colour stability on exposure to light and UV rays Stabilité des couleurs à la lumière et aux rayons U.V. Farblichkeit unter Lichteinluss und UV-Strahlung	-	Conforme alle norme, no variazioni Complies with standard, no variation Conforme aux normes, pas de changements Normgerecht, keine Aenderung



Kronos 2 ceramiche S.p.A.

Sede legale: Strada delle Fornaci, 20 41126 Modena

Sede amministrativa: Via Monte Bianco, 3 41042 Fiorano Modenese (Modena) Italy

Tel. 0039 0536 927711 - Fax 0039 0536 845608 - Fax Estero 0039 0536 1815811

info@kronos2.it - www.kronosceramiche.com

